

# EXHIBIT

2-10-03 60445722 .0207 A/P

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): JRI LEE and BEHZAD RAZAVI

Docket: G&amp;C 30448.116-US-P1

Title: A 40-GB/S CLOCK AND DATA RECOVERY CIRCUIT IN 0.18MM CMOS TECHNOLOGY

CERTIFICATE OF MAILING UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL904211438US

Date of Deposit: February 7, 2003

I hereby certify that this paper or fee is being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

By: 

Name: Suzie McLeave

JC912 U.S. PTO  
60/445722  
02/07/03

## BOX PROVISIONAL PATENT APPLICATION

Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 C.F.R. 1.53(c) on behalf of the following inventors:

|     |                         |                               |                          |                          |
|-----|-------------------------|-------------------------------|--------------------------|--------------------------|
| (1) | Full Name Of Inventor   | Family Name                   | First Given Name         | Second Given Name        |
|     | Residence & Citizenship | City                          | State or Foreign Country | Country of Citizenship   |
|     | Post Office Address     | Post Office Address           | City                     | State & Zip Code/Country |
|     |                         | LEE                           | JRI                      |                          |
|     |                         | Montebello                    | California               | Taiwan                   |
|     |                         | 1635 Neil Armstrong St., #203 | Montebello               | California 90640/USA     |
| (2) | Full Name Of Inventor   | Family Name                   | First Given Name         | Second Given Name        |
|     | Residence & Citizenship | City                          | State or Foreign Country | Country of Citizenship   |
|     | Post Office Address     | Post Office Address           | City                     | State & Zip Code/Country |
|     |                         | RAZAVI                        | BEHZAD                   |                          |
|     |                         | Los Angeles                   | California               | USA                      |
|     |                         | 10717 Wilshire Blvd., #401    | Los Angeles              | California 90024/USA     |

Enclosed herewith are the following application parts:

- ☒ Transmittal sheet, in duplicate, containing Certificate Of Mailing Under 37 CFR 1.10.
- ☒ Provisional Patent Application: 8 page(s) of a specification, 1 page Cover Sheet/Abstract.
- ☒ Verified statement to establish small entity status.
- ☒ Assignment of the invention to The Regents of the University of California, Recordation Form Cover Sheet.
- ☒ Power of Attorney and Exclusion of Inventors.
- ☒ A charge to Deposit Account in the amount of \$80.00 to cover the Filing Fee.
- ☒ A charge to Deposit Account in the amount of \$40.00 to cover the Assignment Recordation Fee.
- ☒ Return postcard.


(PTO TRANSMITTAL - NEW FILING)

60445722 .020703

Please charge all fees to Deposit Account No. 50-0494 of Gates & Cooper LLP. A duplicate of this sheet is enclosed.

**CUSTOMER NUMBER 22462.**

**GATES & COOPER LLP**  
Howard Hughes Center  
6701 Center Drive West, Suite 1050  
Los Angeles, CA 90045  
(310) 641-8797

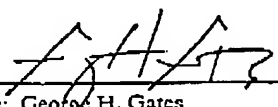By:   
Name: George H. Gates  
Reg. No.: 33,500  
Initials: GHG/sjm

(PTO TRANSMITTAL - NEW FILING)

60445722 020703

## A 40-Gb/s Clock and Data Recovery Circuit in 0.18- $\mu$ m CMOS Technology

Jri Lee and Behzad Razavi  
Electrical Engineering Department  
University of California, Los Angeles

September 1, 2002

Correspondence Address:

Behzad Razavi  
56-147D, EIV  
Electrical Engineering Department  
University of California  
Los Angeles, CA 90095-1594  
Tel: (310) 206-1633, Fax: (310) 206-8495  
e-mail: razavi@icsl.ucla.edu

Suggested Subcommittee: Wireline Communication

### Abstract

A 40-Gb/s CDR circuit incorporates a quarter-rate phase detector and a multiphase LC oscillator to retune the data and demultiplex it into four 10-Gb/s outputs. Fabricated in 0.18- $\mu$ m CMOS technology, the circuit produces a clock jitter of 0.9 ps,rms and 9.67 ps,pp with a PRBS of  $2^{31} - 1$  while consuming 144 mW.

"Express Mail" mailing label number 92904211438us  
Date of Deposit FEBRUARY 7, 2003  
I hereby certify that this paper or folio is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:  
Commissioner for Patents, Washington, D.C. 20231  
SHWE MC CREAG  
(Printed Name)  
[Signature]  
(Signature)

60445722, 020703

1

Clock and data recovery (CDR) circuits operating at tens of gigabits per second pose difficult challenges with respect to speed, jitter, signal distribution, and power consumption. Half-rate 40-Gb/s CDR circuits have been implemented in bipolar technology [1, 2], but they require 5-V supplies and draw 1.6 to 5 watts of power. (The work in [1] uses an external oscillator and 90° phase shifter.) On the other hand, the recent integration of 10-Gb/s receivers in CMOS technology [3] encourages further research on CMOS solutions for higher speeds, especially if it enables low-voltage, low-power realization. This paper presents the design and experimental verification of a 40-Gb/s phase-locked CDR circuit fabricated in 0.18- $\mu\text{m}$  CMOS technology.

### A. CDR Architecture

Shown in Fig. 1, the circuit incorporates a multiphase voltage-controlled oscillator (VCO), a quarter-rate phase detector (PD), a voltage-to-current (V/I) converter, and a simple loop filter. The PD uses the half-quadrature phases provided by the VCO to sample the input data every 12.5 ps, thereby detecting data edges and determining whether the clock is early or late. Four of these samples fall in the center of the data eye, retiming and demultiplexing the 40-Gb/s input into four 10-Gb/s outputs. In the absence of data transitions, the V/I converter generates no output current, leaving the oscillator control line undisturbed. The circuit is fully differential, except for the oscillator control line. With quarter-rate sampling, the flipflops' hold time can be four times as long as that required in full-rate operation, but their acquisition speed must still guarantee correct sampling of the input bits in less than 25 ps.

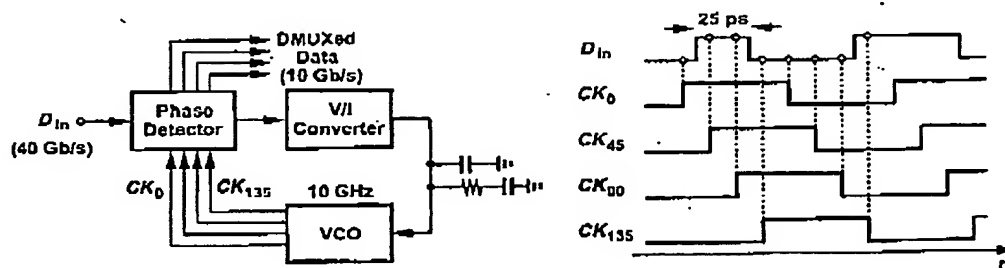


Fig. 1. CDR architecture.

60445722.020703

2

### B. Building Blocks

**VCO** The speed, jitter, and driving capability required of the oscillator point to the use of an LC realization. A number of multiphase LC oscillators have been reported. Coupled oscillators [4, 5] operate away from the resonance frequency of the tanks so as to create the required phase shift, thus bearing a trade-off between reliability of oscillation and the phase noise [5]. Furthermore, such topologies are prone to oscillation at more than one frequency because they can satisfy gain and phase requirements at multiple frequencies. The multiphase oscillator in [6] drives transmission lines by a gain stage loaded by resistors, incurring energy loss in each cycle.

The multiphase oscillator introduced here is based on the concept of differential stimulus of a closed-loop transmission line at equally-spaced points. Illustrated in Fig. 2, the circuit sustains a phase separation of  $180^\circ$  at diagonally-opposite nodes, providing  $45^\circ$  phase steps in between. Unlike the topologies in [5] and [7], this circuit does not operate away from the resonance frequency. Moreover, its oscillation frequency is uniquely given by the travel time of the wave around the loop. Also, in contrast to the design in [6], the transmission line requires no termination resistors, thereby displaying lower phase noise and larger voltage swings for a given power dissipation and inductor  $Q$ .

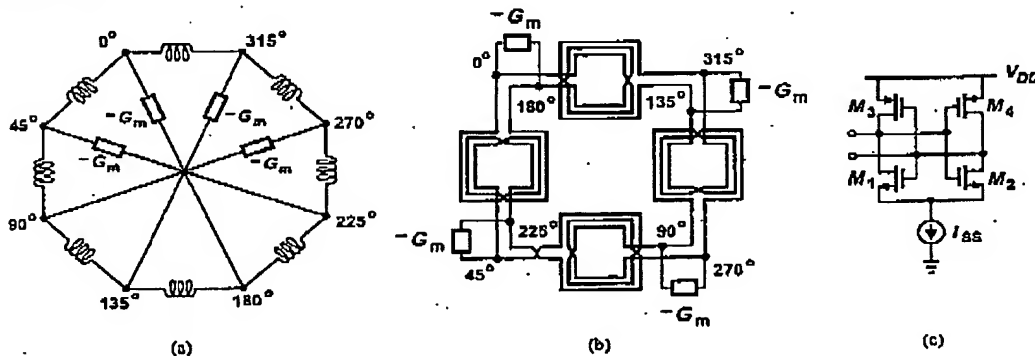


Fig. 2. (a) Proposed half-quadrature oscillator, (b) modification of (a), (c) realization of  $-G_m$  cell.

The topology of Fig. 2(a) nonetheless necessitates long interconnects between the nodes and their corresponding  $-G_m$  cells. However, recognizing that diagonally-opposite inductors carry currents that are  $180^\circ$  out of phase, we modify the circuit as shown in Fig. 2(b), grouping inductor elements into differential structures and placing the  $-G_m$  cells in close proximity of the oscillator nodes. Exploiting the higher  $Q$  of differential inductors [8], the VCO incorporates the  $-G_m$  cell

60445722.020703

3

shown in Fig. 2(c), shaping the rising and falling edges by the PMOS transistors and hence lowering the upconversion of  $1/f$  noise [9]. SpectreRF simulations indicate that, for a given power dissipation, inductor  $Q$ , and frequency of oscillation, the proposed oscillator achieves twice the voltage swings and 12 dB lower phase noise than that in [6].

Each differential port of the VCO is buffered by an inductively-loaded differential pair. These buffers (1) isolate the VCO from the long interconnects going to the PDs that would otherwise introduce greater uncertainty in the oscillation frequency; (2) generate voltage swings above the supply voltage, thus driving the flipflops efficiently; (3) isolate the VCO from the data edges coupled through the phase detectors.

**Phase Detector** The PD employs eight flipflops to strobe the data at 12.5-ps intervals [Fig. 3(a)]. In a manner similar to an Alexander topology [10], the PD compares every two consecutive samples by means of an XOR gate, generating a net output current if the two are unequal, i.e., if an edge has occurred. With no data transitions, the FFs produce equal outputs, and the V/I converters a zero current.

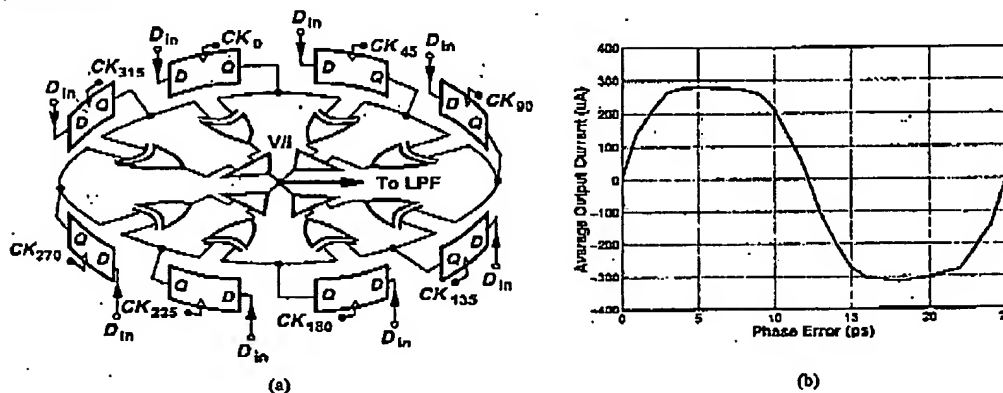


Fig. 3. (a) Quarter-rate phase detector, (b) its characteristic.

The early-late phase detection method used here exhibits a bang-bang characteristic, forcing the CDR to align every other edge of the clock with the zero crossings of data under the locked condition. In reality, the metastable behavior of the flipflops leads to a finite PD gain, allowing the clock edges to sustain some offset with respect to the data zero crossings. Shown in Fig. 3(b) is the input/output characteristic of the PD together with the V/I converter, obtained by transistor-level simulations while the circuit senses a 40-Gb/s random data stream and eight phases of the 10-GHz

60445722, 020703

4

clock. For a phase error less than  $\pm 2.5$  ps, the PD displays a relatively constant gain of  $100 \mu\text{A}/\text{ps}$ . With an ideal V/I converter, a finite phase difference,  $\Delta\phi$ , would still lead to injection of a finite current into the loop filter (similar to an ideal integrator), forcing the CDR circuit to lock with zero static phase error. The output resistance of the V/I converter, on the other hand, results in lossy integration, necessitating a small change in  $\Delta\phi$  as the control voltage varies from minimum to maximum.

Even though the PD flipflops operate with a 10-GHz clock, proper sampling of 40-Gb/s data still requires fast recovery from the previous state and rapid acquisition of the present input. To this end, both a wide sampling bandwidth and a short clock transition time are necessary. Figure

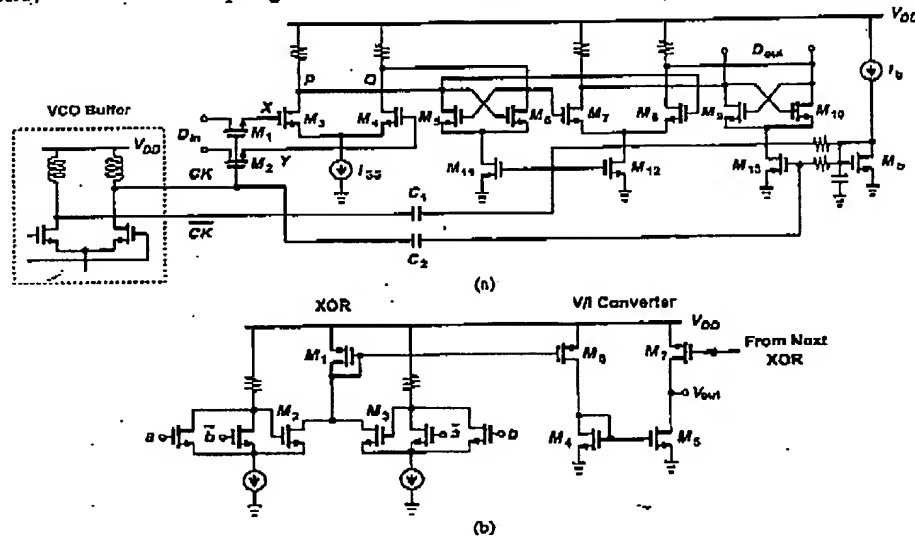


Fig. 4. (a) Proposed flipflop, (b) symmetric XOR gate and V/I converter.

4(a) depicts the master-slave flipflop used in the phase detector. Here, NMOS switches  $M_1$  and  $M_2$  sample  $D_{in}$  on the parasitic capacitances at nodes  $X$  and  $Y$  when  $CK$  is high. Since the minimum input common-mode (CM) level is dictated by the gate-source voltage of  $M_3$ - $M_4$  and the headroom required by  $I_{SS}$ , the sampling switches experience only an overdrive voltage of 0.5 V even if  $CK$  reaches  $V_{DD}$ , failing to provide fast sampling. This issue is remedied by setting the CM level of  $CK$  and  $\overline{CK}$  equal to  $V_{DD}$ , a choice afforded by inductively-loaded stages following the VCO core. The peak value of  $CK$  thus exceeds  $V_{DD}$  by 0.8 V, more than doubling the sampling speed of  $M_1$  and  $M_2$ . The large clock swings also minimize the transition times.



60445722 .020703

5

With large clock swings available, the current switching in pairs  $M_5$ - $M_6$ ,  $M_7$ - $M_8$  and  $M_9$ - $M_{10}$  is accomplished by gate control rather than conventional source-coupled steering. The proposed topology offers two advantages: (1) since the tail current source is removed,  $M_{11}$ - $M_{13}$  can be quite narrower, presenting a smaller capacitance to the VCO buffer; (2) since the drain currents of  $M_{11}$ - $M_{13}$  are not limited by a tail current source, these transistors experience "class AB" switching, drawing a large current at the peak of the clock swing and providing greater voltage swings and a higher gain in the data path.

The XOR gates used in the PD must exhibit symmetry with respect to their two inputs and operate with a low supply voltage. Shown in Fig. 4(b) along with the V/I converter, the XOR gate is a modified version of that in [11], with transistors  $M_2$  and  $M_3$  forming local positive feedback loops and avoiding the reference voltage necessary in the realization in [11]. The V/I converter copies the output current of the XOR, providing nearly rail-to-rail swings for the oscillator control line.

### C. Experimental Results

The CDR circuit has been fabricated in a 0.18- $\mu\text{m}$  CMOS technology. Figure 5 shows a photo of the die, which measures  $1.0 \times 1.4 \text{ mm}^2$ . The circuit is tested on a high-speed probe station with a 40-Gb/s Anritsu random data generator providing the input.


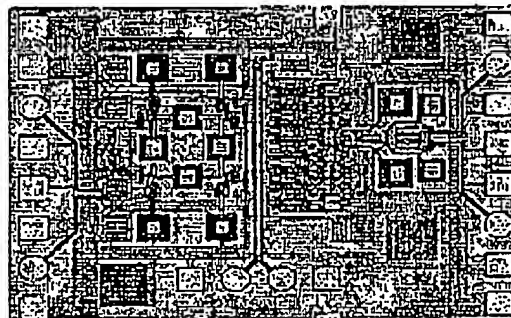


Fig. 5. Chip micrograph.


Shown in Fig. 6 are the VCO tuning characteristic and free-running spectrum. The VCO provides a tuning range of 1.2 GHz with a free-running phase noise of  $-105 \text{ dBc/Hz}$  at 1-MHz offset. Figure 7(a) depicts the CDR input and output waveforms under locked condition in response

60445722.020703

6

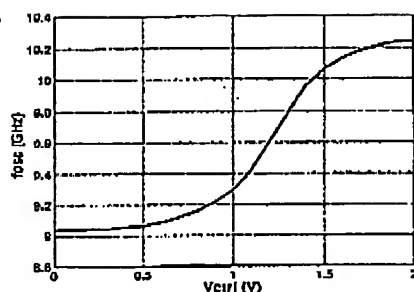

(a)

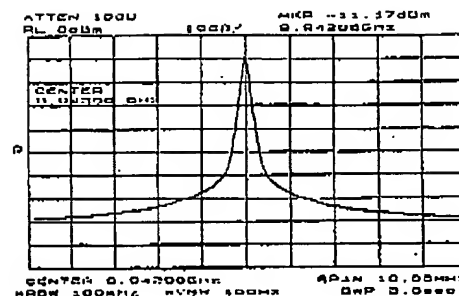

(b)

Fig. 6. (a) VCO tuning range, (b) free-running spectrum.

|                   | [1]  | [2]         | [6]                | This Work          |
|-------------------|--|-------------|--------------------|--------------------|
| Input Data Rate   | 40 Gb/s  | 40 Gb/s     | 10 Gb/s            | 40 Gb/s            |
| Output Data Rate  | 2 x 20 Gb/s  | 4 x 10 Gb/s | 2 x 5 Gb/s         | 4 x 10 Gb/s        |
| Rec. Clock Jitter | 0.8 ps,rms   | 0.7 ps,rms  | 1.2 ps,rms         | 0.9 ps,rms         |
| Power Diss.       | 1.6 W  | 4.3 W       | 360 mW             | 144 mW             |
| Supply Voltage    | 5 V  | 5 V         | 1.8 V              | 2 V                |
| Area              | 0.9 mm x 0.9 mm                                    | 3 mm x 3 mm | 1.9 mm x 1.5 mm    | 1.0 mm x 1.4 mm    |
| Technology        | 50-GHz Bipolar<br>(Uses external<br>VCO & divider) | 72-GHz SiGe | 0.18- $\mu$ m CMOS | 0.18- $\mu$ m CMOS |

Table 1. CDR performance summary.


to a pseudo-random sequence of length  $2^{31} - 1$ . The demultiplexed data experiences some ISI, but if further demultiplexing is included on the same chip, the ISI can be tolerated. Figure 7(b) shows the recovered clock, suggesting an rms jitter of 1.756 ps and a peak-to-peak jitter of 9.67 ps. However, as shown in the inset, the oscilloscope itself suffers from rms and peak-to-peak jitters of 1.508 ps and 8.89 ps, respectively. Thus, the CDR output contains a jitter of 0.9 ps,rms and at most 9.67 ps,pp.<sup>1</sup> The performance of this work and some other previously-published CDR circuits is summarized in Table 1.<sup>2</sup>

<sup>1</sup>It is unclear whether and how the peak-to-peak values can be subtracted.


<sup>2</sup>The power dissipation noted here for the design in [2] excludes their limiting amplifier and frequency detector contribution and was obtained through private communication with M. Reinhold.

60445722 .020703

7

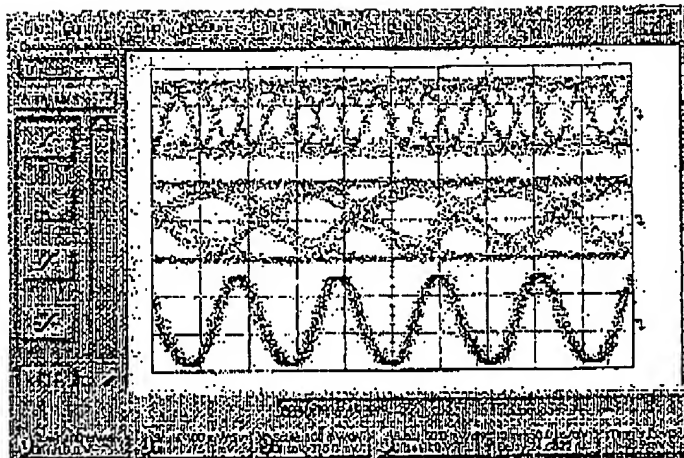

(a)

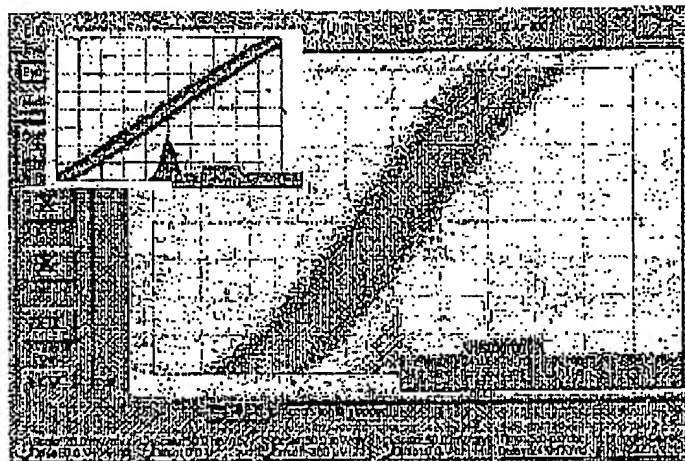

(b)

Fig. 7. (a) Top to bottom: input data, one demultiplexed output data, and recovered clock (horizontal scale: 50 ps/div, vertical scale: 100 mV/div), (b) clock jitter measurement (horizontal scale: 5 ps/div for both histograms).

60445722,020703

8

## REFERENCES

- [1] M. Wurzer et al, "A 40-Gb/s Integrated Clock and Data Recovery Circuit in a 50-GHz  $f_T$  Silicon Bipolar Technology," *IEEE Journal of Solid-State Circuits*, vol. 34, pp. 1320-1324, Sept. 1999.
- [2] M. Reinhold et al, "A Fully Integrated 40-Gb/s Clock and Data Recovery IC with 1:4 DEMUX in SiGe technology," *IEEE Journal of Solid-State Circuits*, vol. 36, pp. 1937-1945, Dec. 2001.
- [3] J. Cao et al, "OC-192 Receiver in Standard 0.18 $\mu$ m CMOS," *ISSCC Dig. Tech. Papers*, pp. 250-251, Feb. 2002.
- [4] J. Kim and B. Kim, "A Low Phase-Noise CMOS LC Oscillator with a Ring Structure," *ISSCC Dig. of Tech. Papers*, pp. 430-431, Feb. 2000.
- [5] T. P. Liu, "A 6.5 GHz Monolithic CMOS Voltage-Controlled Oscillator," *ISSCC Dig. of Tech. Papers*, pp. 404-405, Feb. 1999.
- [6] J. E. Rogers and J. R. Long, "A 10-Gb/s CDR/DEMUX with LC Delay Line VCO in 0.18 $\mu$ m CMOS," *ISSCC Dig. of Tech. Papers*, pp. 254-255, Feb. 2002.
- [7] J. Savoj and B. Razavi, "A 10-Gb/s CMOS Clock and Data Recovery Circuit with Frequency Detection," *ISSCC Dig. Tech. Papers*, pp. 78-79, Feb. 2001.
- [8] M. Danesh et al., "A Q-Factor Enhancement Technique for MMIC Inductors," *Proc. IEEE Radio Frequency Integrated Circuits Symp.*, pp. 217-220, April 1998.
- [9] A. Hajimiri and T. H. Lee, "A General Theory of Phase Noise in Electrical Oscillators," *IEEE Journal of Solid-State Circuits*, pp. 179-94, Feb. 1998.
- [10] J. D. H. Alexander, "Clock Recovery from Random Binary Data," *Electronics Letters*, vol. 11, pp. 541-542, Oct. 1975.
- [11] B. Razavi et al, "Design Techniques for Low-Voltage High-Speed Digital Bipolar Circuits," *IEEE Journal of Solid-State Circuits*, pp. 332-9, March 1994.

60445722.020703

**NONPROFIT ORGANIZATION**  
**STATEMENT CLAIMING SMALL ENTITY STATUS**  
**(37 C.F.R. 1.9(e) AND 1.27(d)) - NONPROFIT ORGANIZATION**

I hereby state that I am an official empowered to act on behalf of the nonprofit organization identified below:

NAME OF ORGANIZATION: The Regents of the University of California  
ADDRESS OF ORGANIZATION: 1111 Franklin Street, 12<sup>th</sup> Floor  
Oakland, California 94607

**TYPE OF NONPROFIT ORGANIZATION:**

- a) ☒ UNIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION  
b) ☐ TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 U.S.C. 501(a) and 501(c)(3))  
c) ☐ NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA  
(NAME OF STATE \_\_\_\_\_)  
(CITATION OF STATUTE \_\_\_\_\_)  
d) ☐ WOULD QUALIFY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 U.S.C. 501(a) and 501(c)(3)) IF LOCATED IN THE UNITED STATES OF AMERICA  
e) ☐ WOULD QUALIFY AS NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA IF LOCATED IN THE UNITED STATES OF AMERICA  
(NAME OF STATE \_\_\_\_\_)  
(NAME OF STATUTE \_\_\_\_\_)

I hereby state that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 C.F.R. 1.9(e) for purposes of paying reduced fees to the United States Patent and Trademark Office regarding the invention, entitled: A 40-GHz Clock and Data Recovery Circuit in 0.18µm CMOS Technology by inventor(s) JRI JEE and BEHZAD RAZAVI described in:

- ☒ the specification filed herewith.

I hereby state that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above-identified invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights in the invention is listed below\* and no rights in the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37b C.F.R. 1.9(c) or by any concern which would not qualify as a small business concern under 37 C.F.R. 1.9(d) or a nonprofit organization under 37 C.F.R. 1.9(e). \*NOTE: Separate verified statements are required from each named person, concern or organization having rights in the invention averring to their status as small entities. (37 C.F.R. 1.27)

|         |                                     |   |   |
|---------|-------------------------------------|---|---|
| NAME    | N/A                                 |   |   |
| ADDRESS | _____                               |   |   |
|         | <input type="checkbox"/> INDIVIDUAL | <input type="checkbox"/> SMALL BUSINESS | <input type="checkbox"/> NONPROFIT ORGANIZATION |
| NAME    | N/A                                 |   |   |
| ADDRESS | _____                               |   |   |
|         | <input type="checkbox"/> INDIVIDUAL | <input type="checkbox"/> SMALL BUSINESS | <input type="checkbox"/> NONPROFIT ORGANIZATION |


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as small entity is no longer appropriate. (37 C.F.R. 1.29(b))

60445722 .020703

NAME: Douglas C. Crawford  
TITLE: Licensing Officer  
ADDRESS: 1111 Franklin Street, 5<sup>th</sup> Floor  
Oakland, California 94607-5200

SIGNATURE:

DATE:

  
7 February 2007

60445722.020703

Attorney Docket No.: G&amp;C 30448.116-US-P1

Applicant(s): JRI LEE and BEHZAD RAZAVI

Serial No.: Not yet assigned

Filed: Herewith

For: A 40-Gb/s Clock and Data Recovery Circuit in 0.18- $\mu$ m CMOS  
Technology

Group: Not yet assigned

Examiner: Not yet assigned

**POWER OF ATTORNEY BY ASSIGNEE  
AND EXCLUSION OF INVENTOR(S) UNDER 37 C.F.R. 3.71**

Dear Sir:

The undersigned assignee of the entire interest in the above-identified subject application hereby appoints

George H. Gates  
Victor G. Cooper  
Karen S. Canady  
William J. Wood  
Richard B. Cates  
Jason S. Feldmar  
Bradley K. Lortz

Registration No. 33,500  
Registration No. 39,641  
Registration No. 39,927  
Registration No. 42,236  
Registration No. 36,100  
Registration No. 39,187  
Registration No. 45,472

as its attorney to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, said appointment to be to the exclusion of the inventors and their attorney(s) in accordance with the provisions of 37 C.F.R. 3.71.

An assignment of the entire interest in the above-identified subject application:

[ ] was recorded on \_\_\_\_\_ at reel/frame \_\_\_\_\_/\_\_\_\_\_

[X] is submitted herewith for recording.

Please direct all telephone calls to George H. Gates at (310) 641-8797 and all correspondence relative to said application to the following address:

Gates & Cooper LLP  
Howard Hughes Center  
6701 Center Drive West, Suite 1050  
Los Angeles, California 90045


UC Docket No. 2003-280-1  
G&C Docket No. G&C 30448.116-US-P1

60445722.020703

Page -2-

Dated: 7 February 2003

ASSIGNEE: THE REGENTS OF THE UNIVERSITY OF CALIFORNIA

Signature: 

Name: Douglas G. Crawford

Title: Licensing Officer

Address: Office of Technology Transfer  
1111 Franklin Street, 5<sup>th</sup> Floor  
Oakland, California 94607

UC Order No. 2003-280-1  
CC Docket No. CAC 104-R.116.435-P1



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**